

## SAVE TIME AND MONEY.

Introducing the NEW AshRoss ST Unloading System, a truly innovative machine designed to work hand-in-hand with your belly/end dump trailers.

The new ST revolutionizes the way you handle materials. A belly dump trailer is positioned over the conveyor belt opening and dumps, a second trailer is repositioned over the opening and dumps, and the truck pulls off the machine all in about 2-3 minutes. Two end dump trailers can feed the system simultaneously by backing up the ST ramps and dumping into the conveyor belt opening.\* A heavy-duty conveyor transports material into other conveying systems (such as radial stackers), piles, transport vehicles, barges, or trains (not only more efficient, but minimizes the chance for contamination). That's it! The truck drives away making room for the next load.

Because of its unique tried-and-tested design, the AshRoss ST can handle materials other drive over systems can not handle, including: aggregates, hot asphalt, coal, roto mill (asphalt grindings), agricultural products, contaminated materials, roller compacted concrete, low slump concrete, bank run, and other materials that requires special handling with minimal contamination.

## DISASSEMBLES FOR RELOCATION

The AshRoss ST can be assembled and disassembled into three separate components. This makes it possible to have the system ready for transportation in less than 2 hours.

## RELIABLE PERFORMANCE AND PROVEN TRACK RECORD.

High-grade steel for the deck and structural beams make this machine equal to the most demanding jobs. It is designed to handle a fully loaded belly/end dump trailer. Once you realize the advantages of this patented, high-speed drive-over unloading system for belly/end dump trailers, you'll want to join our growing list of customers (world wide) who have used it to add to their bottom line.

\* Requires the AshRoss end dump attachment as additional cost.

## ASHROSS ST SYSTEM SPECIFICATIONS


Length 60 ft.

Deck Width 12 ft.


Deck Opening 6 ft. x 16 ft.

Feeder Plates to Main Belt 6 reciprocating slider plates.


Power Source Electrical 440 3-phase (diesel is optional).

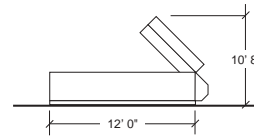

FRONT VIEW

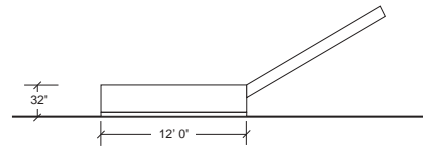


FRONT VIEW-OPERATING

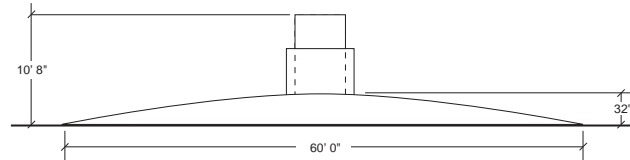

SIDE VIEW

# The Ashross ST

## New Stationary Model

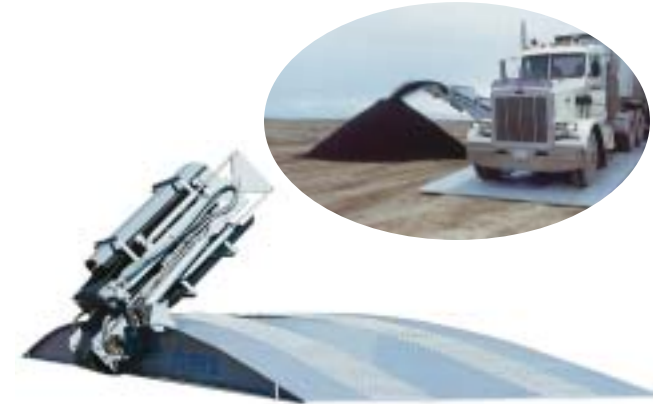


## Stationary Unloading System

- 3 components assembled / disassembled in less 2 hrs
  - electrically powered (diesel optional)
- Low profile, uses a minimum amount of space
- Works with other conveyor systems

**AshRoss, L.L.C.**  
530 South 250 West • Pleasant Grove, Utah 84062  
Telephone 801.785.6464 • Fax 801.785.6486  
Internet: [www.ashross.com](http://www.ashross.com) • Email: [sales@ashross.com](mailto:sales@ashross.com)



# High speed drive-over unloading system for belly /end dump trailers.

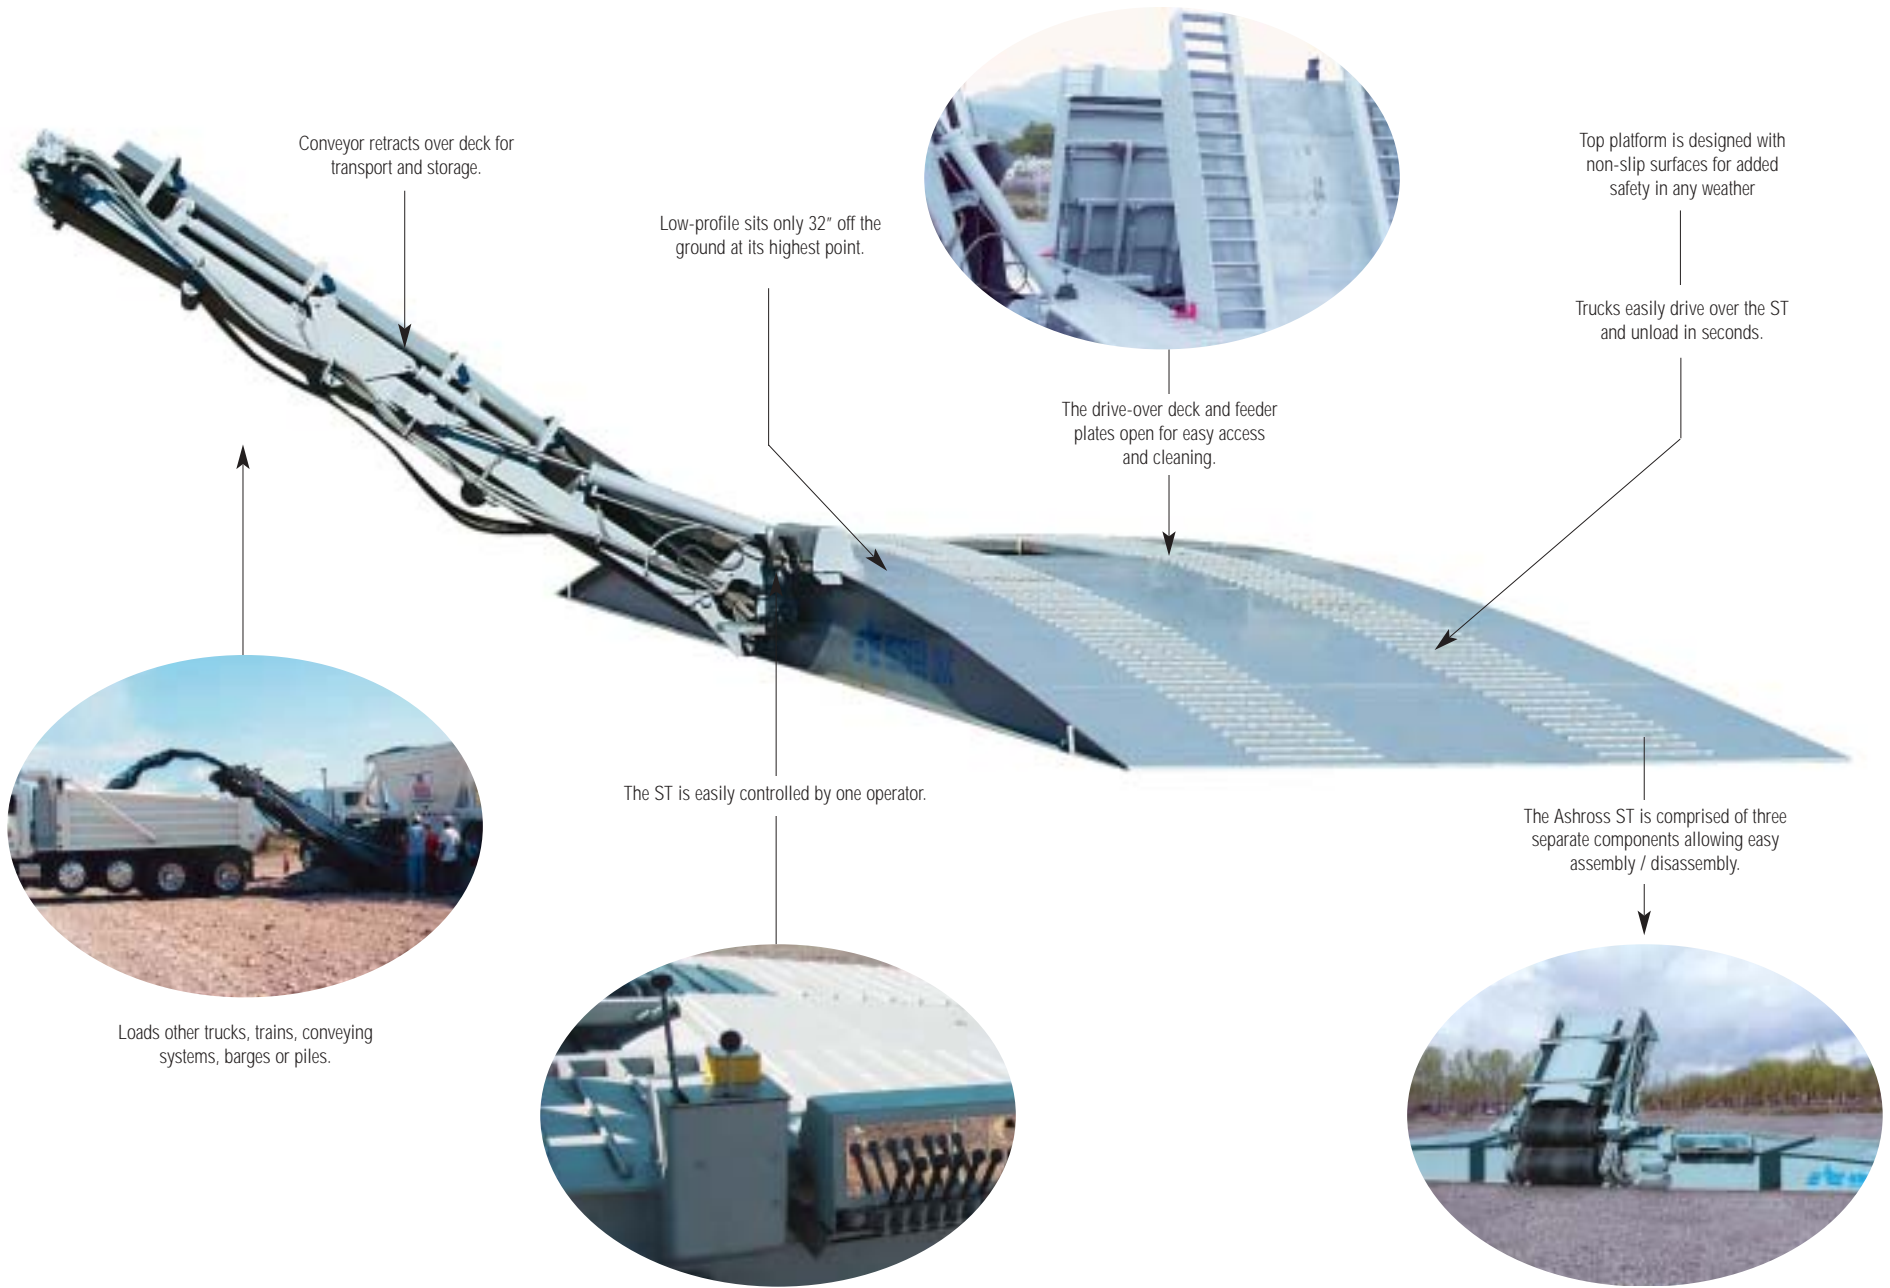

Call 1.801.785.6464 or visit us at [www.ashross.com](http://www.ashross.com)